

BECK LATINOAMERICA, S.A.

COMMERCIAL HEAD OFFICE

Via Argentina Edificio Balmoral, Panamá City, Panamá Tel: (+34) 626 393 054 Email: becklatinoamerica@gmail.com

MAIN FACTORY

4FL,No.50-18,Lung Hsiang ST,Taoyuan City, Taoyuan Hsien, Taiwan Tel: 886-3-375-8290


High Speed Double Interlock Circular Knitting Machine Series







High Speed Double Interlock Circular Knitting Machine Series

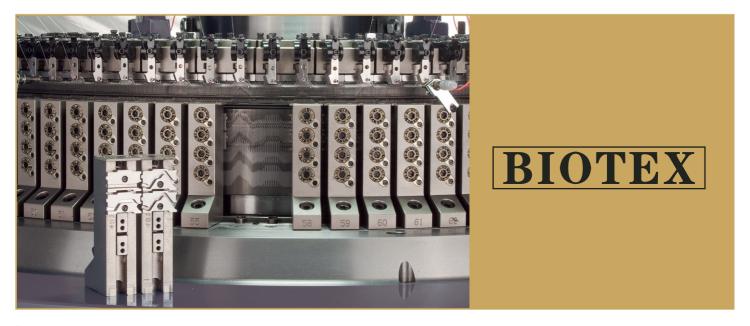

Introduction

The new designed high speed knitting machine (It could reach 30-40 rpm at its tiptop running speed.) could keep the high quality knitting fabric and overcome the common single large circular knitting machine's disadvantage of the low speed (The speed is 20-30 rpm.) and low output.

:Features

- 1. Adopting the special designed CAM and reformed dial segment dicer's construction design, special appearance, fluency CAM's track, so as to protect the needle from snapping during its running.
- 2. Equipped with yarn feed ring and prolong type designed yarn feeder to make yarn feeding & adjusting more .smoothly
 - 3. Adopting screw adjustment to induce the convenience and fleetness of adjusting fabric density.
- 4. Along with different cylinder gauge, it's easy to change and more suitable for knitting fabric market demand. It can produce various double cloth in high quality and various thickness.

It has many advantages with the just right feeders. The cam is easy to be changed and the turning speed is faster. It is a high effective double knitting machine.

MODEL	DIAMETER	GAUGE	FEEDER	MATERIAL
BD-2.1-PD2A	14"-38"	14G-24G	30F-80F	
BD-2.1-PD4A	14"-38"	16G-44G	30F-80F	Chemical fiber, Cotton, Silk
BD-2.4-PD4A	18"-38"	14G-32G	44F-92F	
BD-2.6-PD4A	14"-38"	16G-44G	36F-98F	
BD-2.8-PD4A	14"-38"	16G-44G	40F-106F	
BD-4.2-PD4A	14"-38"	16G-44G	58F-160F	
BD-3.2-PD4R	30"-38"	18G-30G	96F-122F	
BD-1.8-SM4A	14"-38"	14G-24G	24F-68F	
BD-2.1-SM4A	14"-38"	14G-24G	30F-80F	